


Flush Mount Kit WSFB 52V

Mounting

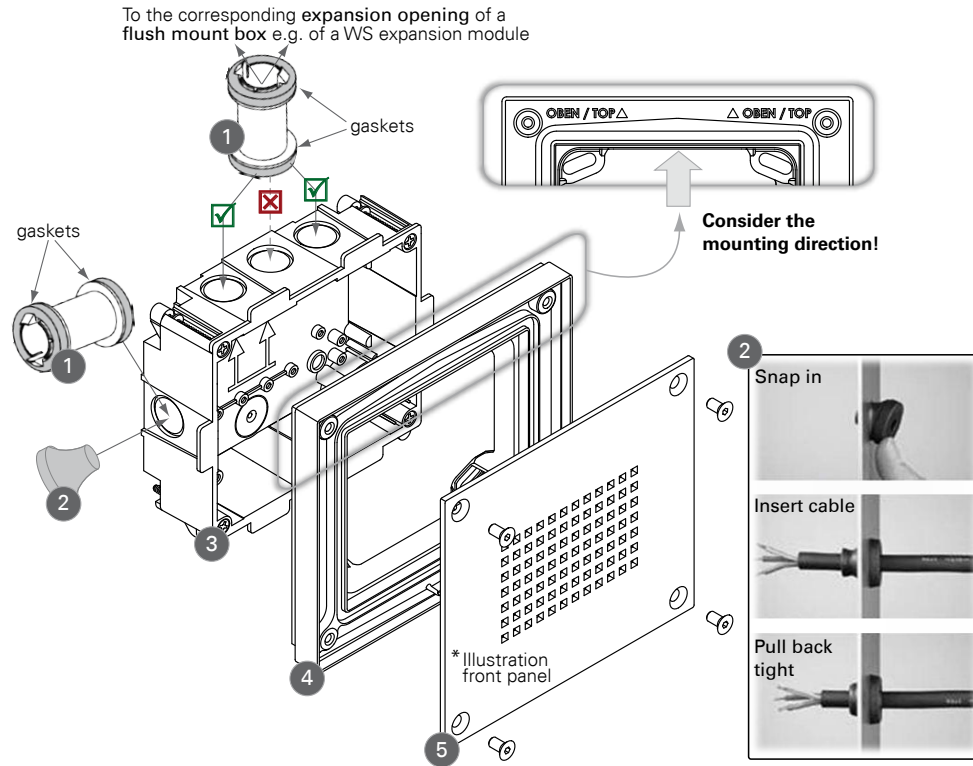

1 Connection spacer (with gaskets) for connecting two flush mount boxes and for cable feed through

- When mounting the device to the top or bottom side of a WS station or an expansion module, the connection spacer in the extent of supply has to be mounted to the outer expansion openings (see above)
- Make sure the connection spacer is snapped-in correctly in the expansion opening!

2 IP66 cable feed through

- Put in cable feed through after breaking out the expansion openings (installation cable feed through, see above)

3 Flush mount box (polycarbonate)

- For cavity wall mounting or installation in a panel, use cavity wall claws (wall thickness: 2 – 30 mm / 0.08 – 1.18 in)

4 Mounting frame (metal) incl. gasket


- Screw mounting frame onto the flush mount box (screws in extent of supply)

5 Front panel (metal) with station electronics

- Screw front panel onto mounting frame

Dimensions

Measuring units in mm (inch), not to scale! Cutout for flush mount box: 136 (5.36) x 112 (4.41)

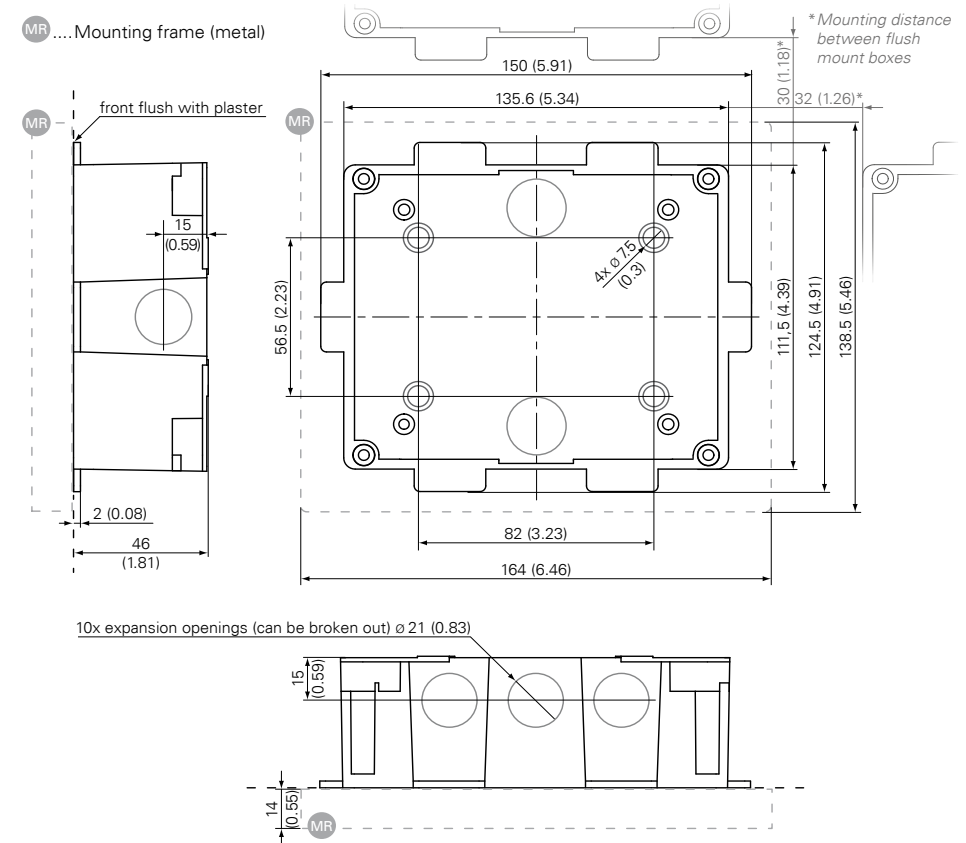


Manufacturer's reference



The components may be only installed by authorised engineers.
Keep this description in safe custody!

Unterputz-Kit WSFB 52V

Montage

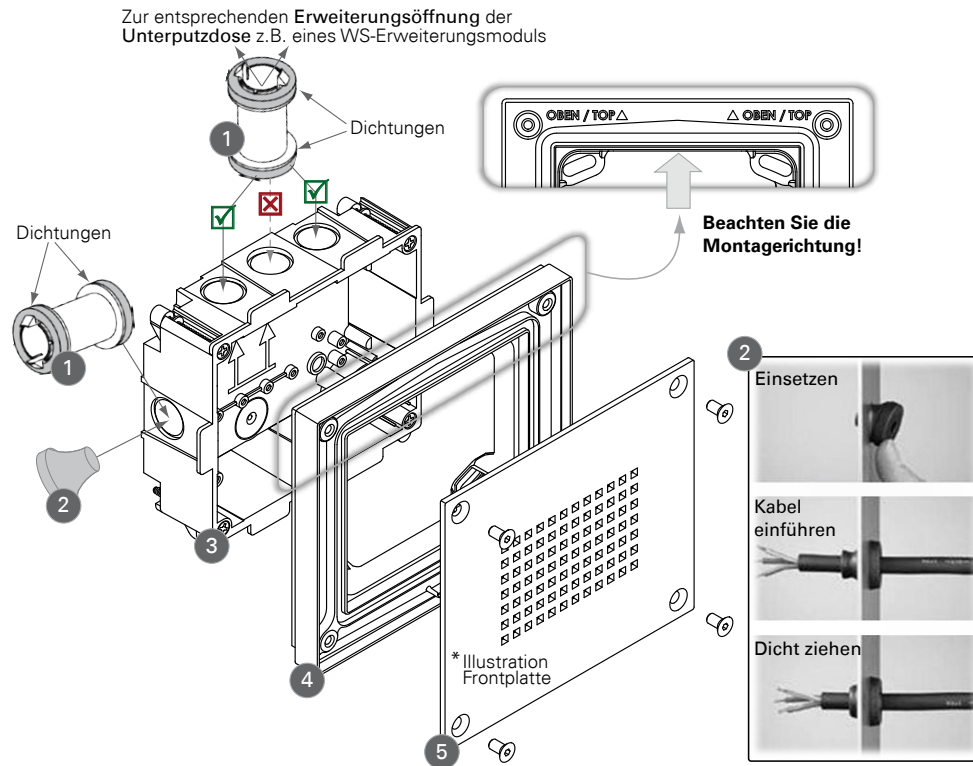

1 Verbindungshülse (mit Dichtungen) für das Verbinden zweier Unterputzdosen miteinander sowie für das Durchführen von Kabeln

- Bei Verbindung mit einer WS-Sprechstelle oder einem Erweiterungsmodul an der Ober- oder Unterseite, müssen die mitgelieferten Verbindungshülsen an den äußeren beiden Erweiterungsöffnungen montiert werden (siehe oben)
- Auf richtiges Einrasten der Verbindungshülse in der Erweiterungsöffnung achten!

2 IP66-Kabeldurchführung

- Die Kabeldurchführungen können nach Herausbrechen der Erweiterungsöffnungen eingesteckt werden

3 Unterputzdose (Kunststoff)

- Bei Hohlwandmontage oder Pulteinbau sind Hohlwandkrallen zu verwenden (Wandstärke: 2 – 30 mm)

4 Montagerahmen (Metall) inkl. Dichtung


- Montage durch Verschraubung mit Unterputzdose (Schrauben im Lieferumfang enthalten)

5 Frontplatte Metall mit Sprechstellen-Elektronik

- Montage durch Verschraubung mit Montagerahmen

Maßzeichnung

Maße in mm, kein Maßstab! Dosen-Ausschnittsmaß: 136 x 112

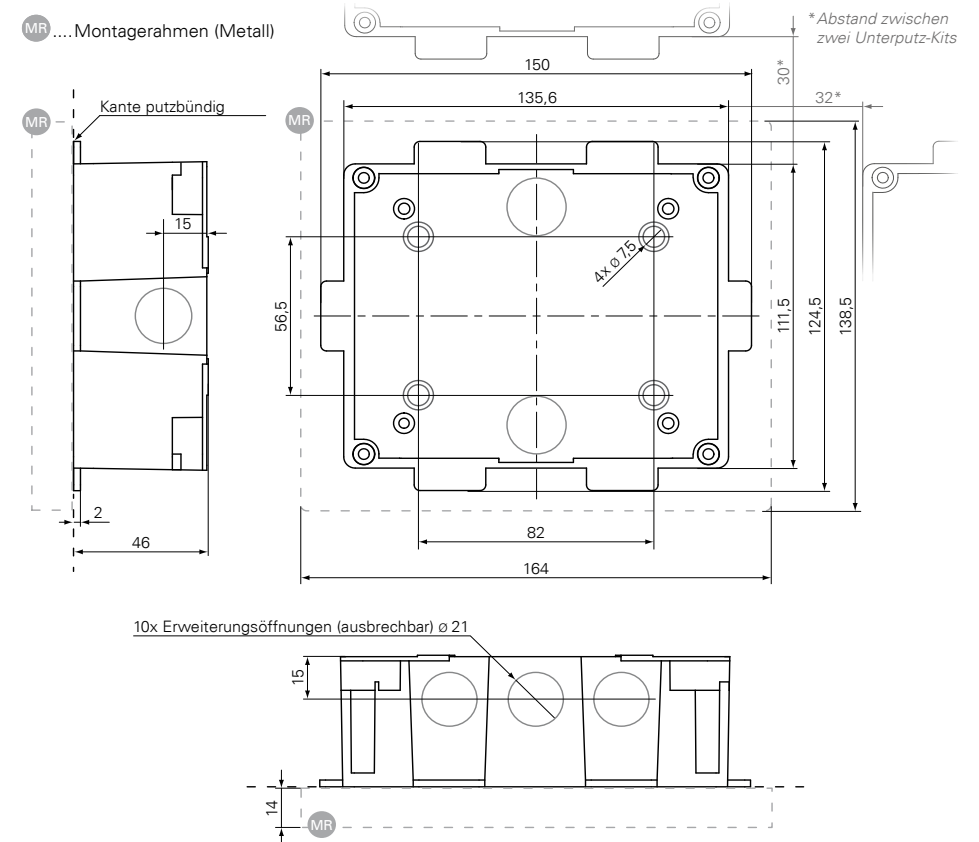

Hinweis des Herstellers



Die Komponenten dürfen nur von autorisiertem Fachpersonal installiert werden. Bewahren Sie diese Beschreibung sorgfältig auf!