


POE-SPLIT-M


Mounting kit for POE-SPLIT

Mounting with top-hat rail clamp

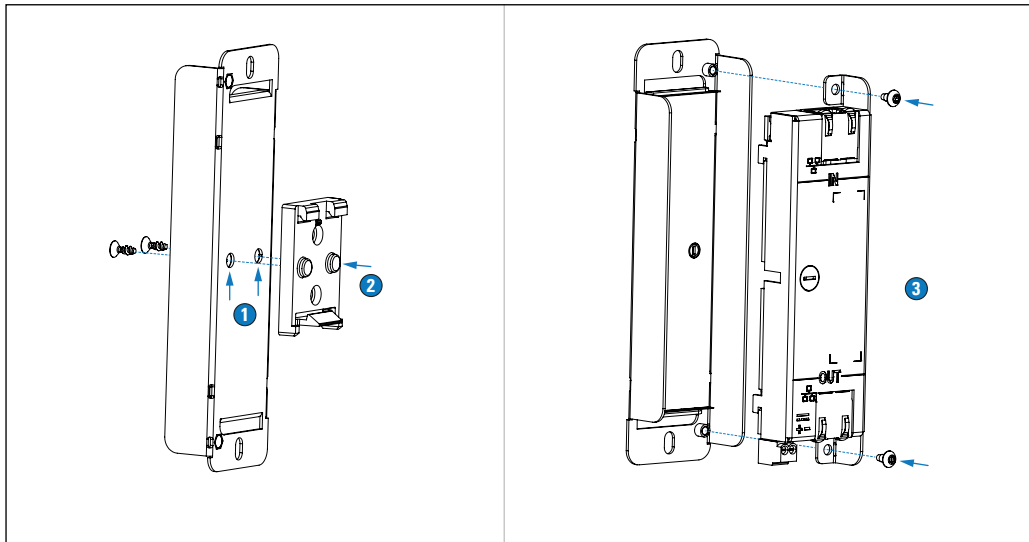

- Break open the holes ① in the housing.
- Position the top-hat rail clamp ② in the desired orientation and screw it onto the housing shell from the inside.
- Place the POE-SPLIT ③ in the correct orientation (ensure correct mounting direction) in the housing and screw it on.
- *Optional:* If the installation situation permits it, use these mounting holes ⑤ for installation (see below).


Mounting with double-sided adhesive tape

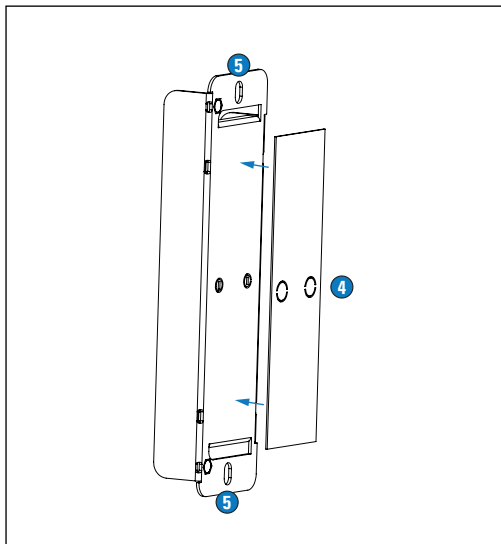

- Place the POE-SPLIT ③ in the correct orientation (ensure correct mounting direction) in the housing and screw it on (see above).
- Place the double-sided adhesive tape ④ on the bottom side of the housing shell (only for the flush mount box of an id5, od5 or od10). There must be no contact between the Intercom station and the POE-SPLIT inside the flush mount box. The orientation of the POE-SPLIT must be adapted to the respective wiring.
- *Optional:* If the installation situation permits it, use these mounting holes ⑤ for installation.

Dimensions

Measuring units in mm (in), not to scale!

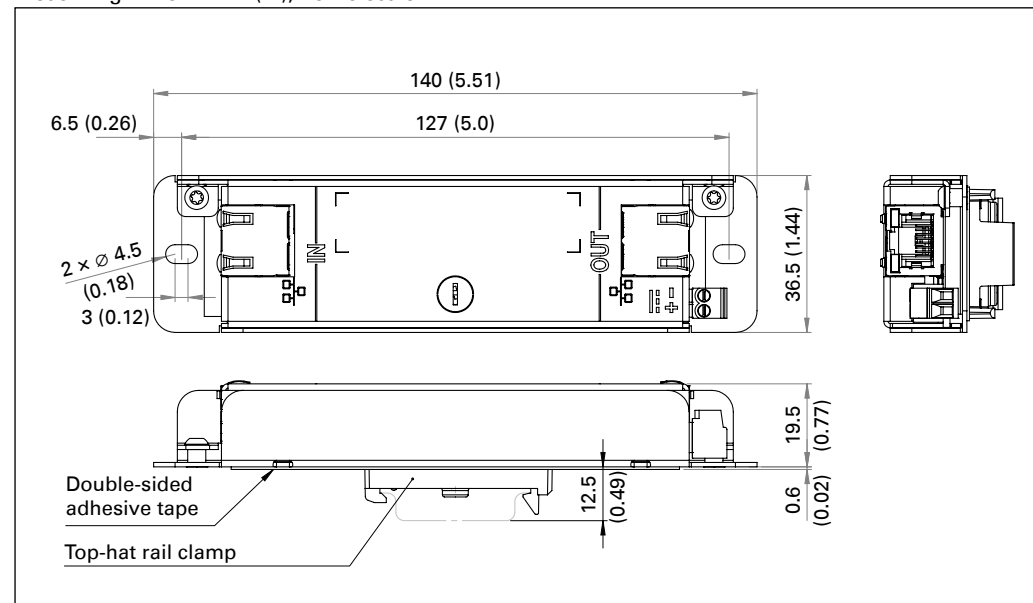

Mounting instructions

- This kit shall be installed by trained and qualified personnel only.
- Only use recommended tools when installing this kit.
- The double-sided tape is intended for one-time application and cannot be realigned after it has been positioned.
- Do not install this kit on unstable walls or on surfaces which cannot support the weight of the device.

Extent of supply

- Housing shell lined with insulation foil on the inside
- 2 pan head screw (M3x5, TX 10) for mounting the POE-SPLIT onto the housing shell
- Top-hat rail clamp
- 2 countersunk screw (PT3x8, TX 10) for mounting the top-hat rail clamp
- Double-sided adhesive tape for alternative mounting
- 2 wall mounting screws (4 x 45 mm, Phillips recessed head) incl. dowels (SX6)
- Short reference

Manufacturer's reference


For technical specifications, see the respective data sheet.
For the latest software and documentation, visit: www.commend.com
Keep this description in safe custody.



POE-SPLIT-M


Montage-Kit für POE-SPLIT

Montage mit Hutschienehalter

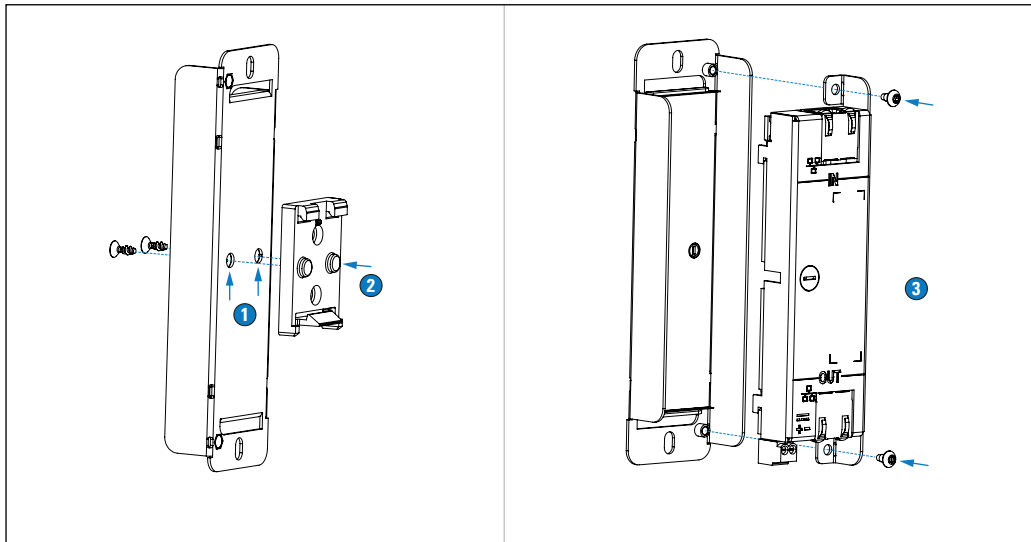

- Brechen Sie die Gehäusebohrungen ① auf.
- Positionieren Sie den Hutschienehalter ② in der gewünschten Ausrichtung und verschrauben Sie diesen von innen mit der Gehäuseschale.
- Legen Sie den POE-SPLIT in der richtigen Ausrichtung (Montagerichtung beachten) in die Gehäuseschale ③ und verschrauben Sie diese.
- *Optional:* Wenn es die Einbausituation zulässt, verwenden Sie zur Montage diese Bohrungen ⑤ (siehe unterhalb).


Montage mit doppelseitigem Klebeband

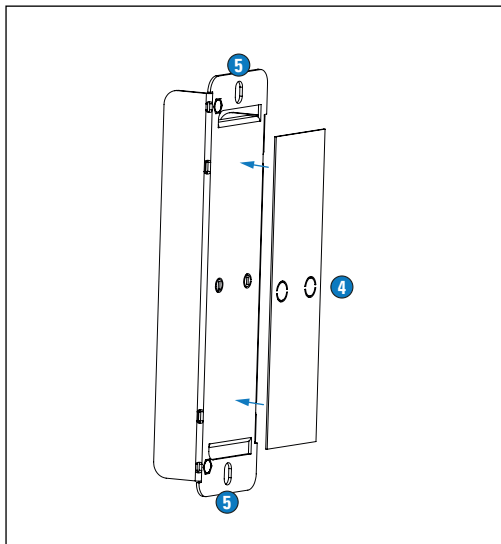

- Legen Sie den POE-SPLIT in der richtigen Ausrichtung (Montagerichtung beachten) in die Gehäuseschale ③ und verschrauben Sie diese (siehe oben).
- Kleben Sie das doppelseitige Klebeband ④ auf der Unterseite der Gehäuseschale (nur für die Unterputzdose eines id5, od5 oder od10) auf. Innerhalb der Auf- oder Unterputzdose dürfen sich die Sprechstelle und der POE-SPLIT nicht berühren. Die Ausrichtung des POE-SPLIT muss der jeweiligen Verkabelung angeglichen werden.
- *Optional:* Wenn es die Einbausituation zulässt, verwenden Sie zur Montage diese Bohrungen ⑤.

Abmessungen

Maße in mm, kein Maßstab!

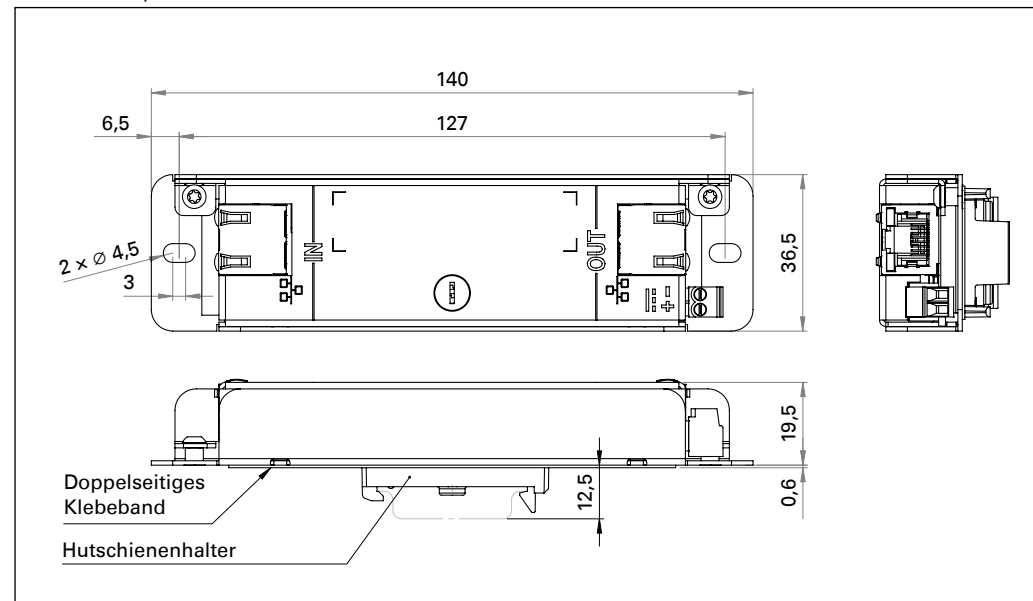

Montagehinweise

- Dieses Kit darf nur von ausgebildetem Fachpersonal installiert werden.
- Verwenden Sie für die Installation nur die dafür vorgesehenen Werkzeuge.
- Das doppelseitige Klebeband ist nur für ein einmaliges Aufkleben vorgesehen und kann nach dem Positionieren nicht neu ausgerichtet werden.
- Montieren Sie dieses Kit nicht auf instabilen Wänden oder auf Oberflächen, die das Gewicht des Geräts nicht tragen können.

Lieferumfang

- Gehäuseschale mit innen montierter Isolationsfolie
- 2 Linsenkopfschraube (M3x5, TX 10) zur Montage des POE-SPLIT an der Gehäuseschale
- Hutschienehalter
- 2 Senkkopfschraube (PT3x8, TX 10) zur Montage des Hutschienehalters
- Doppelseitiges Klebeband für alternative Montage
- 2 Wandmontageschrauben (4 x 45 mm, Kreuzschlitz) inkl. Dübel (SX6)
- Beipackzettel

Hinweis des Herstellers

Technische Spezifikationen sind im entsprechenden Datenblatt zu finden.
Die aktuellste Software und Dokumentation finden Sie unter: www.commend.com
Bewahren Sie diese Beschreibung sorgfältig auf.

